


Lineare AXITEC Höchstleistungsgarantie  
 Linear AXITEC high performance guarantee  
 Garanzia lineare AXITEC massimo rendimento  
 Garantie exclusive de puissance maximale linéaire AXITEC



**15 Jahre Garantie auf 90% Nennleistung**  
**15 years guarantee on 90% of the nominal power**  
**15 anni di garanzia sul 90% del rendimento nominale**  
**Garantie de 15 ans à 90% de la puissance nominale**

**25 Jahre Garantie auf 85% Nennleistung**  
**25 years guarantee on 85% of the nominal power**  
**25 anni di garanzia sul 85% del rendimento nominale**  
**Garantie de 25 ans à 85% de la puissance nominale**

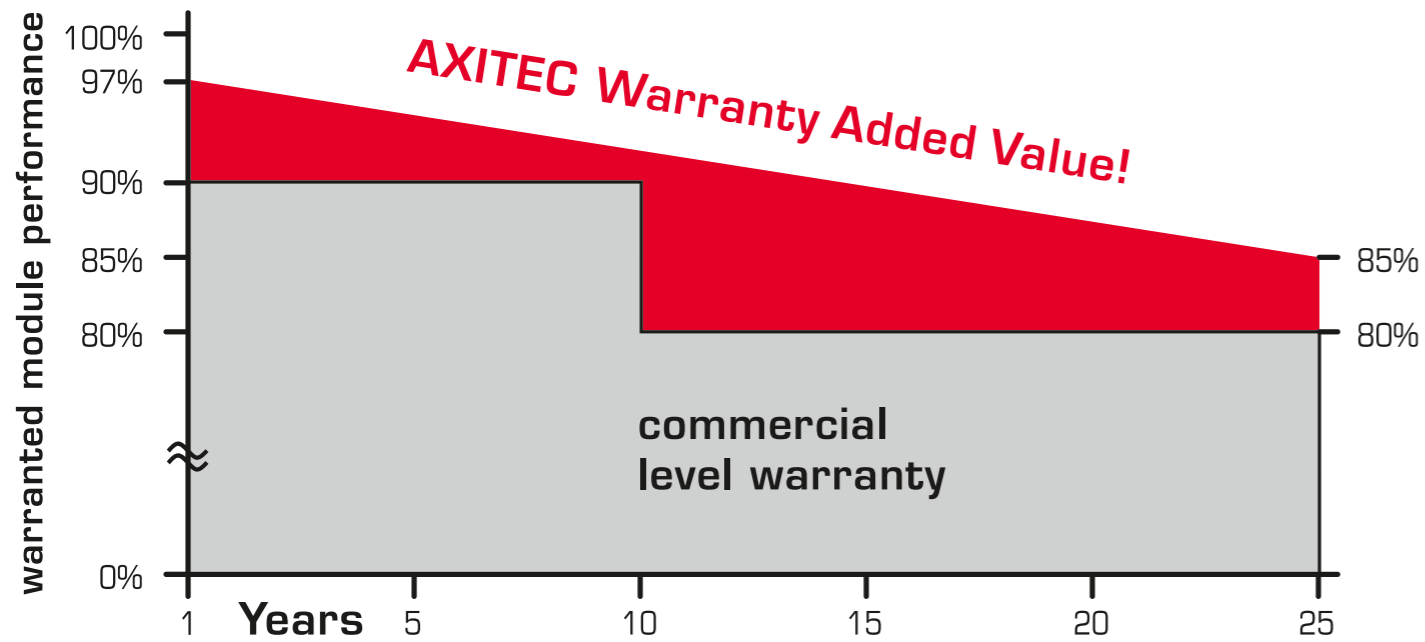

DIN ISO 9001:2008



Modulübersicht  
 Module overview  
 Indice moduli  
 Présentation du module



Photovoltaik für höchste Ansprüche  
 Photovoltaics for the highest level  
 Fotovoltaico per le maggiori esigenze  
 Modules PV les plus hauts standards



10 Jahre Herstellergarantie  
 10 years manufacturer guarantee  
 10 anni di garanzia del produttore  
 10 ans de garantie de fabricant



Positive Leistungstoleranz  
 Positive power tolerance  
 Tolleranza di rendimento positiva  
 Tolérance de puissance positive



Maximal 5400 Pa Schneelasten  
 Maximum 5400 Pa snow load  
 Carichi massimi di neve 5400 Pa  
 Charges maximales de neige 5400 Pa



AXITEC-Soft-Grip-Falz Aluminiumrahmen  
 AXITEC-Soft-Grip-Seam aluminium frame  
 AXITEC-Soft-Grip telaio di alluminio  
 AXITEC-Soft-Grip châssis en aluminium

Zelltyp Type of cell Tipo di cella Type de cellule	Modultyp Type of module Tipo di modulo Type de module	Nennleistung Nominal output Potenza nominale Puissance nominale	Plus-Toleranz Plus-tolerance Tolleranza positiva Tolérance positive	Wirkungsgrad Efficiency Rendimento Rendement	Nennspannung Nominal voltage Tensione nominale Tension nominale	Nennstrom Nominal current Corrente nominale Courant nominale	Systemspannung System voltage Tensione di sistema Tension de système	Länge Length Lunghezza Longue	Breite Width Larghezza Largeur	Höhe Height Altezza Hauteur	Schneelast Snow load Carichi di neve Charges de neige
		Pmpp [Wp]	[Wp]	[%]	Umpp [V]	Impp [A]	[VDC]	[mm]	[mm]	[mm]	[Pa]
<b>AXIpower Asia</b> 60-zellig Poly 60 cells Poly 60 celle Poli 60 cellules Poly	 AC-225P/156-60S	225	+4,9	13,83	29,90	7,53	1000	1640	992	40	5400
	AC-230P/156-60S	230	+4,9	14,14	30,00	7,67	1000	1640	992	40	5400
	AC-235P/156-60S	235	+4,9	14,45	30,10	7,81	1000	1640	992	40	5400
<b>AXIpremium Asia</b> 60-zellig Mono 60 cells Mono 60 celle Mono 60 cellules Mono	 AC-245M/156-60S	245	+4,9	15,06	29,23	8,40	1000	1640	992	40	5400
	AC-250M/156-60S	250	+4,9	15,37	29,65	8,47	1000	1640	992	40	5400
	AC-255M/156-60S	255	+4,9	15,67	30,02	8,54	1000	1640	992	40	5400
<b>AXIpower</b> 60-zellig Poly 60 cells Poly 60 celle Poli 60 cellules Poly	  AC-230P/156-60S	230	+5,9	13,87	29,75	7,74	1000	1663	997	38	5400
	AC-236P/156-60S	236	+5,9	14,23	29,95	7,88	1000	1663	997	38	5400
	AC-242P/156-60S	242	+5,9	14,60	29,97	8,08	1000	1663	997	38	5400
<b>AXIpremium</b> 60-zellig Mono 60 cells Mono 60 celle Mono 60 cellules Mono	  AC-240M/156-60S	240	+4,9	14,48	30,65	7,96	1000	1663	997	38	5400
	AC-245M/156-60S	245	+4,9	14,78	30,72	8,06	1000	1663	997	38	5400
	AC-250M/156-60S	250	+4,9	15,08	30,82	8,14	1000	1663	997	38	5400
<b>AXIpower</b> 54-zellig Poly 54 cells Poly 54 celle Poli 54 cellules Poly	  AC-210P/156-54S	210	+3,9	14,13	26,80	7,85	1000	1501	990	38	5400
	AC-214P/156-54S	214	+3,9	14,40	27,20	7,89	1000	1501	990	38	5400
	AC-218P/156-54S	218	+3,9	14,67	27,60	7,90	1000	1501	990	38	5400
<b>AXIblackpremium IN</b> 60-zellig Mono Indach 60 cells Mono inroof 60 celle Mono tetto a integrazione 60 cellules Mono intégré au toit	  AC-245M/156-60S IN	245	+/- 2%	15,22	29,23	8,40	1000	1684	1017	35	2400
	AC-250M/156-60S IN	250	+/- 2%	15,53	29,65	8,47	1000	1684	1017	35	2400